

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



8362


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H02K 3/40, H01R 4/64, 4/48</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/29018</b> (43) International Publication Date: <b>10 June 1999 (10.06.99)</b>
(21) International Application Number: <b>PCT/EP98/07725</b> (22) International Filing Date: <b>30 November 1998 (30.11.98)</b> (30) Priority Data: <b>9725322.3</b> <b>28 November 1997 (28.11.97)</b> <b>GB</b> (71) Applicant (for all designated States except US): <b>ASEA BROWN BOVERI AB [SE/SE]; S-721 78 Västerås (SE).</b> (72) Inventors; and (75) Inventors/Applicants (for US only): <b>CARSTENSEN, Peter [DK/SE]; Sjövägen 62, S-141 42 Huddinge (SE). NORDSTRÖM, Anders [SE/SE]; Kungsvägen 14, S-191 45 Solentuna (SE).</b> (74) Agent: <b>NEWBY, Martin, John; J.Y. &amp; G.W. Johnson, Kingsbourne House, 229-231 High Holborn, London WC1V 7DP (GB).</b>		(81) Designated States: <b>AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</b>  <b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: **INSULATED ELECTRICAL CONDUCTOR**

(57) Abstract

An electrical conductor for high-voltage (10kV-800kV) windings comprises central electrically conductive means and an outer semiconducting layer. A contacting device (20) comprising a resilient metallic spring member contacts the outer layer for grounding purposes. A single contacting device in the form of an elongate helical spring may contact a plurality of turns of the wound conductor.

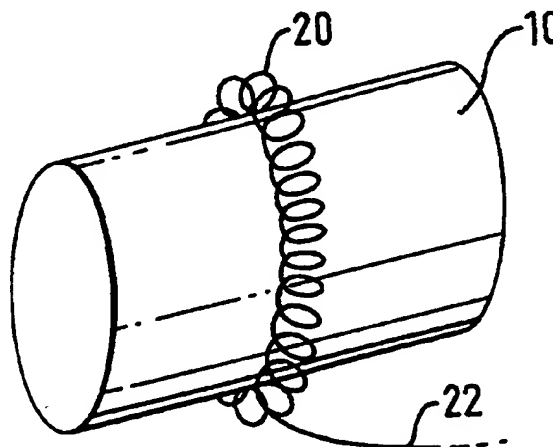

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INSULATED ELECTRICAL CONDUCTOR

The present invention relates to an insulated electrical conductor. More specifically, the invention relates to an insulated conductor, for use in high-voltage windings, having an outer layer of (at least semi-) conductive material which is contacted for grounding purposes. The conductor is intended to be used in large motors, generators and transformers at voltages in excess of 10 kV, in particular in excess of 36 kV, and preferably more than 72.5 kV up to very high transmission voltages, such as 400 kV to 800 kV or higher.

A particular conductor which can be used in the invention is shown in cross section in Figure 1. The conductor 10 comprises strands 12, for example of copper, the majority of which are insulated, surrounded by a first conductive layer 14. An insulating layer 16, for example of cross-linked polyethylene (XLPE), surrounds the first conductive layer 14 and is in turn surrounded by a second conductive layer 18.

Whilst the layers 14, 18 are described as "conductive" they are in practice formed from a base polymer mixed with carbon black or metallic particles and have a volume resistivity of between 1 and  $10^5 \Omega \cdot \text{cm}$ , preferably between 10 and  $500 \Omega \cdot \text{cm}$ . Suitable base polymers for the layers 14, 18 (and for the insulating layer 16) include ethylene vinyl acetate copolymer/nitrile rubber, butyl grafted polythene, ethylene butyl acrylate copolymer, ethylene ethyl acrylate copolymer, ethylene propene rubber, polyethylenes of low density, poly butylene, poly methyl pentene and ethylene acrylate copolymer.

The first conductive layer 14 is rigidly connected to the insulating layer 16 over the entire interface therebetween. Similarly, the second conductive layer 18 is

- 2 -

rigidly connected to the insulating layer 16 over the entire interface therebetween. The layers 14 - 16 form a solid insulation system and are conveniently extruded together around the strands 12.

5        Whilst the conductivity of the first conductive layer 14 is lower than that of the electrically conductive strands 12, it is still sufficient to equalise the potential over its surface. Accordingly, the electric field is distributed uniformly around the circumference of the insulating layer  
10 16 and the risk of localised field enhancement and partial discharge is minimized.

      The potential at the second conductive layer 18, which should be zero or ground, is equalized at this value by the conductivity of the layer. At the same time, the conductive  
15 layer 18 has sufficient resistivity to enclose the electric field. In view of this resistivity, it is desirable to connect the conductive polymeric layer to ground at intervals therealong.

      A problem experienced in making electrical contact with  
20 polymeric layers is that they expand in use, due to their high thermal expansion coefficient, and also creep under mechanical loading.

      It is an object of the invention to maintain the second conductive layer substantially at ground by providing a  
25 suitable contacting device.

      Accordingly, the present invention provides an electrical conductor for high-voltage windings, comprising central conductive means and an outer semiconductive layer, characterised in that at least one contacting device  
30 contacts the outer layer, the at least one contacting device comprising a resilient metallic spring member.

      In a preferred embodiment, the central conductive means

- 3 -

comprises one or more strands of wire, which are surrounded by an inner layer of lower conductivity than the wire, an electrically insulating layer, and then by the outer layer which preferably has a higher conductivity than the  
5 insulating layer.

Preferably, the spring member is of a clad metal. The cladding may be of a noble metal such as silver, gold or platinum in order to resist corrosion. The clad metal may be any metal or alloy of suitable tensile strength.

10 In an embodiment of the invention, the spring member comprises a spiral spring surrounding the outer layer of one or more conductors, such that tension is exerted in the spring member to cause it to engage the outer layer. Conveniently, in this embodiment the spring member comprises  
15 an endless loop.

In an alternative embodiment, the spring member is elongated and urging means is provided for compressing the spring member against the outer layer.

Preferably, the outer layer of the conductor is made  
20 from a polymer mixed with carbon black. A plurality of contacting devices may be provided at intervals along the conductor for grounding purposes.

The contacting device of the invention provides a large contact area with the outer layer of the conductor and  
25 therefore avoids local heating of that layer. Because the device is resilient, the contact force between the device and the conductor is maintained throughout the lifetime of the conductor, despite thermal expansion and contraction of the conductor which occur due to ohmic losses, and the  
30 device is carried along if the outer layer creeps with respect to the central conductive means.

Embodiments of the invention will now be described by

- 4 -

way of example only with reference to the accompanying drawings, in which:-

Figure 1 is a cross-sectional view of a conductor according to the invention, but not showing the contacting device;

Figure 2 is a side view of a contacting device according to a first embodiment of the invention;

Figure 3 shows the contacting device of Figure 2 mounted on the conductor;

Figure 4 is a schematic sectional view of grounded conductors according to a second embodiment of the invention;

Figure 5 is a perspective view of a contacting device according to a third embodiment; and

Figure 6 shows the contacting device of Figure 5 mounted on a conductor.

Figure 2 shows a contacting device 20 in the form of an endless, generally circular, loop of helically twisted wire. In this embodiment, the device 20 is formed from a copper alloy which has been clad with silver.

Figure 3 shows the device 20 mounted on the conductor 10. The internal diameter of the contacting device 20 in its unstressed state is smaller than the external diameter of the conductor 10. Therefore when the contacting device 20 is placed around the conductor, it is tensioned such that it intimately contacts the outer layer 18 of the conductor at every turn of the helix. This ensures good electrical contact between the outer layer 18 and the contacting device 20. A grounding wire 22, one end of which is soldered or otherwise connected to the grounding device, has its other

- 5 -

end connected to ground.

Figure 4 shows an alternative contacting device 30 in the form of an elongated helical spring. This embodiment is suitable for grounding a number of turns 32 of a coiled conductor, for example in a rotating machine or transformer. The device 30 is pressed between a flat member 34, which may be a portion of a housing, and the conductor turns 32. The device 30 is conveniently formed from silver-clad copper - beryllium alloy.

Figure 5 shows another alternative contacting device 40 in the form of a "watch-spring". The contacting device 40 has an internal diameter in its unstressed state which is smaller than the external diameter of the conductor 10.

Figure 6 shows the device 40 mounted on the conductor 10, which can be achieved either by wrapping the device 40 around the conductor or placing it over the end of the conductor. In order to improve electrical contact between the device 40 and the outer layer 18, the latter should be painted with silver paint prior to the addition of the contacting device 40. A grounding wire 42 is folded between two adjacent turns of the contacting device 40 in a particularly convenient manner. This embodiment of the contacting device takes up little space and can be placed on the conductor (which may be a superconductor) independently of other design elements.

The electrical insulation of an electrical conductor according to the invention is intended to be able to handle very high voltages, e.g. up to 800 kV or higher, and the consequent electric and thermal loads which may arise at these voltages. By way of example, electrical conductors according to the invention may comprise windings of power transformers having rated powers from a few hundred kVA up to more than 1000 MVA and with rated voltages from 3 - 4 kV up to very high transmission voltages of from 400 - 800 kV

- 6 -

or more. At high operating voltages, partial discharges, or PD, constitute a serious problem for known insulation systems. If cavities or pores are present in the insulation, internal corona discharge may arise whereby the insulating material is gradually degraded eventually leading to breakdown of the insulation. The electric load on the electrical insulation in use of an electrical conductor according to the present invention is reduced by ensuring that the inner layer of (semi)conductive material of the insulation system is at substantially the same electric potential as conductors of the central electrically conductive means which it surrounds and the (semi)conductive outer layer is at a controlled, e.g. earth, potential. Thus the electric field in the electrically insulating layer between these inner and outer layers is distributed substantially uniformly over the thickness of the intermediate layer. By having materials with similar thermal properties and with few defects in these layers of the insulation system, the possibility of PD is reduced at given operating voltages. The electrical conductor can thus be designed to withstand very high operating voltages, typically up to 800 kV or higher.



- 7 -

CLAIMS

1. An electrical conductor for high-voltage windings, comprising central electrically conductive means and an outer semiconductive layer, characterised in that at least one contacting device contacts the outer layer, the at least one contacting device comprising a resilient metallic spring member.

2. An electrical conductor according to claim 1, wherein the central conductive means comprises one or more strands of wire, which are surrounded in turn by an inner layer of lower conductivity than the wire, an electrically insulating layer, and then by the outer layer.

3. An electrical conductor according to claim 1 or 2, wherein the outer layer is polymeric, includes carbon black and has a volume resistivity of between 1 and  $10^5 \Omega \cdot \text{cm}$ .

4. A conductor according to claim 3, wherein the resistivity of the outer polymeric layer is between 10 and  $500 \Omega \cdot \text{cm}$ .

5. A conductor according to claim 1, 2, 3 or 4, wherein the spring member surrounds the outer layer of the conductor such that tension is exerted in the spring member to cause it to engage the outer layer.

6. A conductor according to any one of the preceding claims, wherein the conductor is wound in a plurality of turns and the metallic member is urged into contact with said turns.

7. A conductor according to any of the preceding claims, wherein the spring member comprises a spiral spring.

8. A conductor according to claim 7, wherein the spring member is in the form of a watch-spring.

- 8 -

9. A conductor according to claim 8, wherein a grounding wire is folded between at least two turns of the watch-spring.

10. A conductor according to any one of claims 1 to 7,  
5 wherein the spring member forms an endless loop.

11. A conductor according to any one of the preceding claims, comprising a plurality of contacting devices spaced at intervals therealong.

12. A conductor according to any one of the preceding  
10 claims, wherein the or each spring member is of a clad metal.




13. A conductor according to claim 12, wherein the cladding is of silver, gold or platinum.

14. A conductor according to claim 12 or 13, wherein  
15 the clad metal is copper or a copper alloy.

15. A conductor according to any one of the preceding claims, characterised in that the electrically conductive means and outer semiconductive layer are designed for high voltage, suitably in excess of 10 kV, in particular in  
20 excess of 36 kV, and preferably more than 72.5 kV up to very high transmission voltages, such as 400 kV to 800 kV or higher.

16. A conductor according to any one of the preceding claims, characterised in that the electrically conductive  
25 means and outer semiconductive layer are designed for a power range in excess of 0.5 MVA, preferably in excess of 30 MVA and up to 1000 MVA.

1 / 2

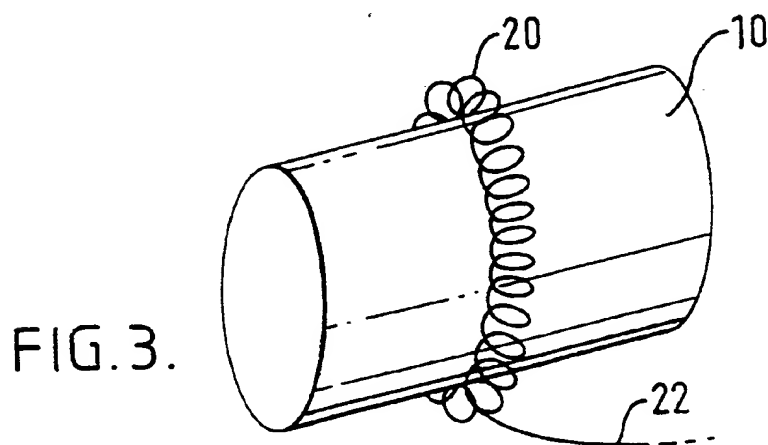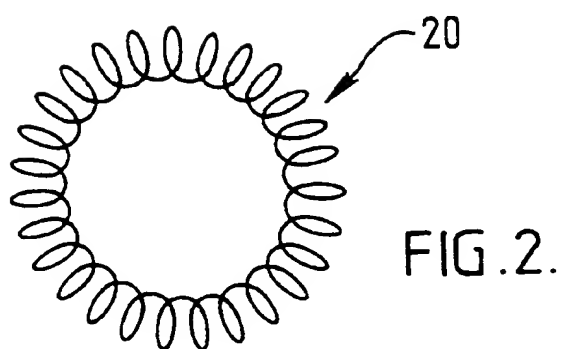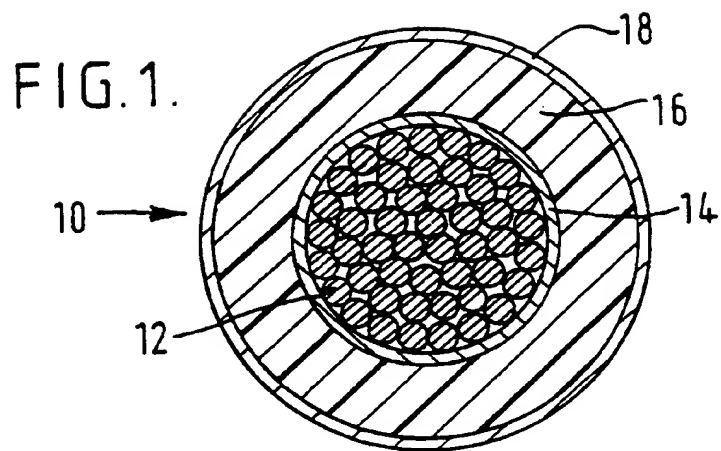

**THIS PAGE BLANK (USPTO)**

2 / 2

FIG. 4.



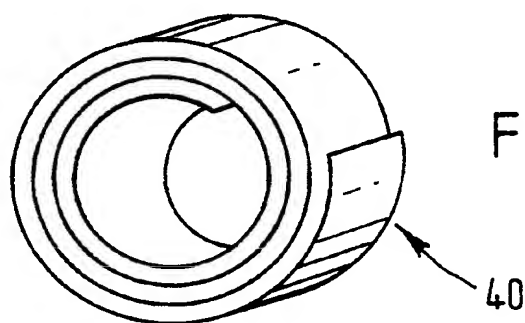


FIG. 5.

FIG. 6.

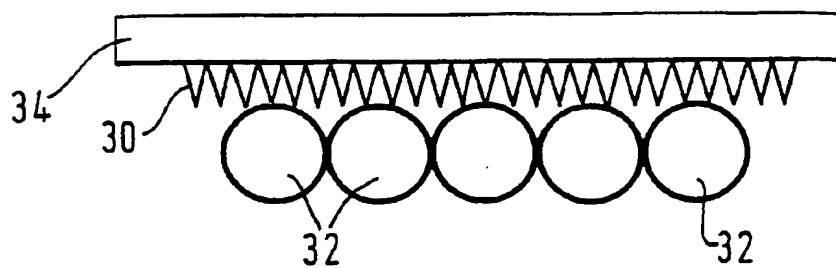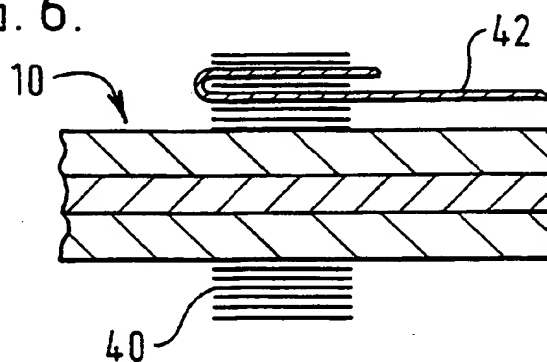

**THIS PAGE BLANK (USPTO)**

# INTERNATIONAL SEARCH REPORT

In national Application No  
PCT/EP 98/07725

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 H02K3/40 H01R4/64 H01R4/48

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H02K H01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 94 06194 A (MUSSBACHER GUENTHER ;MUELLER FRANZ (AT); ELIN ENERGIEVERSORGUNG (A) 17 March 1994 see abstract; figure 1 ---	1,2
A	DE 40 22 476 A (THYSSEN INDUSTRIE ;KABELMETAL ELECTRO GMBH (DE)) 16 January 1992 ---	
A	US 1 508 456 A (WILLIAM G LENZ) 16 September 1924 ---	
A	DE 196 20 222 C (FELTEN & GUILLEAUME ENERGIE ;THYSSEN INDUSTRIE (DE)) 13 March 1997 ---	
A	DE 196 15 158 A (CONTACT GMBH) 23 October 1997 -----	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

12 April 1999

Date of mailing of the international search report

19/04/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Ramos, H

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 98/07725

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9406194 A	17-03-1994	AT 399790 B AT 180892 A CA 2144046 A CN 1085021 A,B DE 59302528 D EP 0659307 A JP 8501437 T	25-07-1995 15-11-1994 17-03-1994 06-04-1994 13-06-1996 28-06-1995 13-02-1996
DE 4022476 A	16-01-1992	NONE	
US 1508456 A	16-09-1924	NONE	
DE 19620222 C	13-03-1997	CA 2236334 A WO 9716881 A EP 0858690 A NO 981953 A CA 2209223 A WO 9716880 A DE 19620221 A EP 0858693 A JP 10512438 T NO 973007 A	09-05-1997 09-05-1997 19-08-1998 30-04-1998 09-05-1997 09-05-1997 07-05-1997 19-08-1998 24-11-1998 27-08-1997
DE 19615158 A	23-10-1997	FR 2747848 A GB 2312341 A,B	24-10-1997 22-10-1997